

Specification Sheet



Description

Operation. The C700 is an oscillating piston style, positive displacement water meter. The product utilizes a piston that water use rotates in a measuring chamber, each piston revolution being equivalent to a known volume of water. The piston movement is transferred by a magnetic drive to a straight reading sealed register which contains the appropriate reduction gearing.

Compliance to Standards. The C700 fully complies with American Water Works Association Standard C700, latest revision, and is California Department of Weights and Measures approved. C700 low-lead bronze models are NSF-61 certified and comply with California Proposition 65.

Installation. The meter must be installed in a clean pipe line, free from any foreign materials. Install the meter with direction of flow as indicated by the arrow cast in the meter case. The meter may be installed in horizontal or inclined lines.

Application. The meter is for use only with POTABLE COLD WATER up to 120°F (50°C) and working pressures up to 150 psi. The meter will register between 98.5% and 101.5% at normal and high flows and between 95% and 101% at the AWWA specified low flow. Accuracy tests are made before shipment, so no adjustments need to be made before installation.

Construction. The meter consists of a main case, an oscillating piston measuring chamber, a strainer, a bolted top plate and O-ring, and a magnetically driven register assembly. The main case is cast in bronze with raised characters showing model, size and direction of flow. The measuring chamber is a bottom-in and side-out design and consists of the measuring chamber with division plate and thrust roller insert, the piston, and chamber top assembly with drive bar and magnet. The main case and the bronze top plate are assembled with an O-ring gasket and bolts threaded into the body. A test port is available as an option. The test-port hole is threaded 1" NPT, fitted with a 1" NPT plug. Each register assembly is secured to the meter with a tamperproof plug, is protected by a hinged lid and is positioned over the inlet throat.

C700 Positive Displacement Meter


Waterworks or Low-lead Bronze, Magnetic Drive, Flanged or NPT Ends

Sizes 1½" and 2"

Specifications

| Sizes: | 1 1/2" | 2" |
|---|---|-------|
| <u>Accuracy (GPM):</u> | | |
| 95% - 101% | 1 1/2 | 2 |
| 98.5%-101.5% | 5-100 | 8-160 |
| Continuous Flow GPM | 50 | 80 |
| Maximum Flow GPM | 100 | 160 |
| Operating Pressure psi | 150 | 150 |
| Operating Temperature °F | 120 | 120 |
| <u>Sweep Hand Registers:</u> | | |
| US Gallons | 100 | 100 |
| Cubic Feet | 10 | 10 |
| Cubic Meters (Canada) | 1/10 | 1 |
| Cubic Meters (Intl.) | 1/10 | 1/10 |
| <u>Capacity of Register (millions):</u> | | |
| US Gallons | 100 | 100 |
| Cubic Feet | 10 | 10 |
| Cubic Meters (Canada) | 1/10 | 1 |
| Cubic Meters (Intl.) | 1 | 1 |
| <u>Register Type:</u> | Permanently sealed direct reading | |
| <u>Materials:</u> | | |
| Main Case | Standard waterworks or optional low-lead Bronze | |
| Top Cover | Standard waterworks or optional low-lead Bronze | |
| Body O-ring | Neoprene Rubber | |
| Body Bolts | Stainless Steel | |
| Measuring Chamber | Thermoplastic | |
| Division Plate | Loaded Nylon | |
| Piston | High Impact Polymer | |
| Thrust Bearing Insert | Loaded Nylon | |
| Driving Bar | Glass Bead Loaded Nylon | |
| 1 1/2" Strainer | Polypropylene | |
| 2" Strainer | Stainless Steel | |
| Register Can | 90% Copper Alloy | |
| Register Lens | Tempered Glass | |
| Register Housing and Lid | Polymer or Bronze | |
| Test Plugs | 1" NPT test plug | |

Register. The register is contained within a 90% copper seamless can which is oven-cured at 150°F for 90 minutes to eliminate condensation. The 5 mm true tempered glass lens is secured with an "L" shaped gasket, then roll sealed to produce a permanently sealed design. To assure easy reading, the totalizer wheels are large and color coded. The applicable size, model, registration, part number and date code are printed on the calibrated dial face. Moving clockwise during operation, the extra-thin center sweep hand does not interfere with meter reading, and the 1:1 piston ratio low-flow indicator gives visual indication of plumbing leaks. For accurate meter testing, 100 clear graduations appear at the register's circumference.

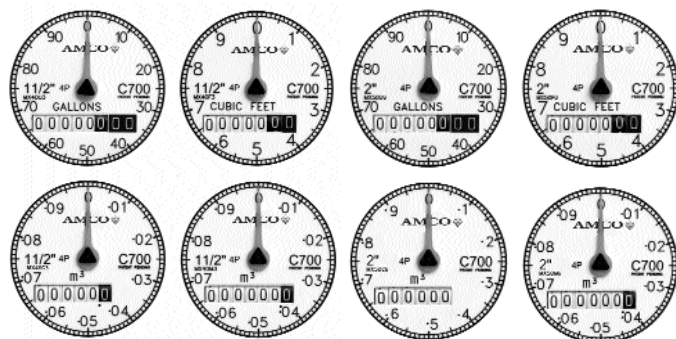

Register Reading Options. C700 meters are available with Absolute Encoder, Generator and Digital register options to provide water usage output to the entire spectrum of meter reading systems, giving flexibility to utilities implementing or upgrading reading technologies. Refer to the following documents for more information:

| | |
|---------------------------|-----------|
| Absolute Encoder Register | EC-700 |
| Generator Register | RR-C7-810 |
| Digital Register | DR-C700 |

Magnetic Drive. The magnetic drive design facilitates coupling between the measuring chamber and the external register. The coupling is absolute at all rated flows.


Connections. The meter is available with two-bolt oval, internal threaded end connections. Both bronze and cast iron oval companion flanges are available. The companion flanges are faced, drilled and tapped, 1 1/2" or 2" as required, with ANSI B.1.20.1 internal taper pipe thread. Also available are bronze coupling nuts and tailpieces for threaded end meters. Both coupling nuts and tailpieces have external taper pipe threads conforming to ANSI B.1.20.1. Their lengths and thread sizes are as specified by AWWA Standards.

Maintenance. The measuring chamber assembly can be removed, repaired or replaced without removing the main case from the service line. Pretested measuring chamber assemblies are available for exchange or purchase, and spare parts are available from our central warehouse or designated regional locations. AMCO Water Metering Systems staffs and operates a repair facility at its U.S. manufacturing plant in Ocala, Florida.


Dimensions & Net Weights

| Meter Size | Dimensions (Inches) | | | | | | Weight (lbs.) | Bolt Hole Dia. |
|-----------------------|---------------------|-------|---------|-------|--------|-------|---------------|----------------|
| | A | B | C | D | E | F | | |
| 1 1/2" Oval (Flanged) | 13 | 8 7/8 | 2 1/8 | 8 1/2 | 11 3/8 | 3 3/4 | 23.7 | 3/4" |
| 1 1/2" Threaded | 12 5/8 | 8 7/8 | 2 1/8 | 7 1/2 | 11 3/8 | 3 3/4 | 21.7 | |
| 2" Oval (Flanged) | 17 | 8 1/8 | 1 3/4 | 8 3/4 | 11 | 3 3/4 | 38.7 | 3/4" |
| 2" Threaded | 15 1/4 | 8 1/8 | 2 15/16 | 8 3/4 | 11 | 3 3/4 | 36.7 | |

C700 1 1/2":

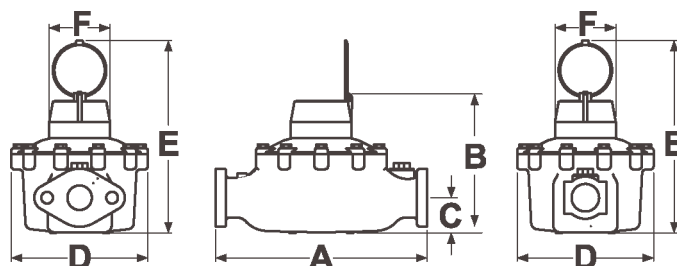

C700 2":

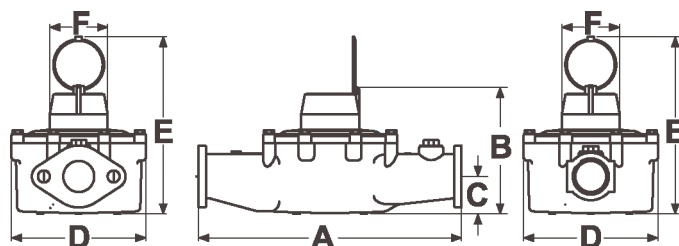

The company's policy is one of continuous product improvement and the right is reserved to modify the specifications contained herein without notice. These products have been manufactured with current technology and in accordance with applicable AWWA Standards.

©2006 AMCO Water Metering Systems. All rights reserved.



AMCO Water Metering Systems Inc.

www.amcowater.com

United States - ISO 9001:2000 Registered
AMCO Water Metering Systems
P. O. Box 1852
Ocala, FL 34478-1852
352-732-4670 FAX 352-368-1950
Outside Florida: 800-874-0890
Inside Florida: 800-356-6829
e-mail:
watermeters@amcowater.com

Canada
Elster Metering
1100 Walker's Line, Ste. 101
Burlington, Ontario L7N 2G3
866-703-7582
905-634-4895
FAX 905-634-6705
e-mail:
watermeters@ca.elster.com

Caribbean
AMCO Water Metering Systems
P. O. Box 225
Carretera 112 KM 2.3
Isabela, PR 00662
787-872-2006
FAX 787-872-5427
e-mail:
prwatermeters@amcowater.com

Mexico
Elster Medidores
Calle Norte 35 No. 983-13
Col. Industrial Vallejo
Del. Gustavo A. Madero
C P 07720
525 55 368 4757
FAX 525 55 368 4782
e-mail:
amcowater@prodigy.net.mx

C700-WW-LL-2/03-06